


## EXTRA HEAVY-DUTY SHOWER ROD

## SR100SQ SR125SQ

**SR100SQ** for 1" (25mm) stainless steel tubing with satin-finish **SR125SQ** for 1-1/4" (32mm) stainless steel tubing with satin-finish



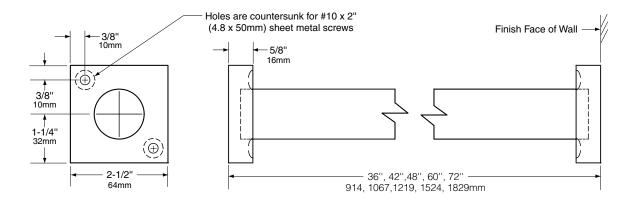

## MATERIALS:

Shower Rod - 18-gauge (1.2mm) type 304 stainless steel tubing. Special lengths available up to 96" (2438mm).

Flanges - 22-gauge (.74mm) type 304 stainless steel with satin-finish. One pieced, formed flange.

## **INSTALLATION:**

Slide flanges onto shower rod. Position flanges against wall and secure with #10 x 2" (4.8 x 50mm) Phillips oval head, stainless steel, sheet metal screws and plastic wall anchors, provided by Gamco. Recommend backing behind all mounting surfaces. For plaster or drywall construction, provide backing to comply with local building codes. For other wall surfaces, use expansion shields with sheet metal screws provided, or provide 1/8" (3mm) toggle bolts or expansion bolts.

Extra Heavy-Duty Shower Rod shall be Model\_\_\_\_\_\_ (insert model number) of Gamco Commercial Restroom Accessories, One Gamco Place, Durant, OK, 74701-1910